




**SINTRONIC TECH**  
 MAKE A DIFFERENCE

## General Access and Security Product Catalogue-2024

Shenzhen Sintronic Technology Company Limited (<https://sintronictech.com>)

Manager:Tim Wu , Mobile/whatSapp&Wechat:+86-15813805304 ,Official Website Email:tim@sintronictech.com

### Access Control System

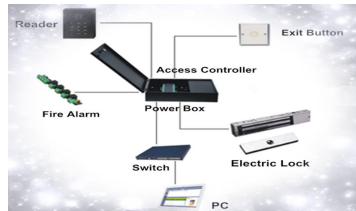

Page/2-28

### Turnstile Gate System






Page/29-40

### Security Guard System




Page/41-62

### Parking Guidance System



Page/63-72

### Parking Ticketing System

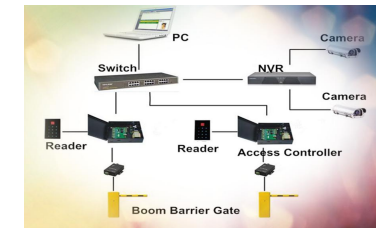

Page/73-86

**V2.0 Updat on 2023.08.01**  
**Original Factory Manufacturer**  
**Address:201,Plaza A,Qianwan 1st Rd,**  
**NanshanShenzhen City,**  
**Guangdong Province,China**  
**Official website <https://sintronictech.com>**















**SINTRONIC TECH**  
 =====  
 MAKE A DIFFERENCE

## Access Control System Price List





**Shenzhen Sintronic Technology Company Limited**





Manager:Tim Wu Email:tim@sintronictech.com <https://sintronictech.com>




Mobile/whatSapp,Wechat:+86 15813805304 Access control department/ sintronic-access-control.com




Access Controller	Stand Alone Unit	Biometric Recognition Machine	RFID Reader
			
Page/3-4	Page/4-8	Page/5-11	Page/12
Drop Bolt Lock	Magnetic Lock	Lock Bracket	Exit Button
			
Page/13-15	Page/16-18	Page/18-20	Page/21-23
Emergency Button	Remoter	RFID Card	Power Supply
			
Page/24	Page/25-26	Page/27	Page/28






**ENABLING A SAFER SOCIETY AND SMARTER ACCESS CONTROL**


S/N	Product Name	Model	Picture	Technical Parameters	Remark
<b>Access Controller</b>					
Economical Series					
1	Single Door Access Controller TCP/IP	AC-101 Economical		Size:160*106mm Power Box Size:273mm*228mm*65mm Communication Model:TCP/IP Power Supply:12VDC 3-5A Reader Input Format:Wiegand26 Card Capacity:20,000 Units Record Capacity:100,000 Units Software:Free Integrated functions of pc remote access,interlock,anti-pass,multi-card.,ect V6.9 Verson Software	
2	2 Door Access Controller TCP/IP	AC-102 Economical			
3	4 Door Access Controller TCP/IP	AC-104 Economical			
4	Integrated Fire and Alarm Extend Board	AC-100 Extend		Four relay alarm output. Connectable to fire signal Input Time delay 0~6000 second adjustable Can control the illegal break-in alarm	
<b>32Bit Series (Inter-Lock, Anti-Pass Back Available in LAN network )</b>					
5	Single Door Access Controller TCP/IP	AC-32Bit301		Size:160*106mm Power Box Size:273mm*228mm*65mm Communication Model:TCP/IP Power Supply:12VDC 4-7A Reader Input Format:Wiegand26/34 Card Capacity:40,000 Units Record Capacity:100,000 Units Database available:Access,SQL2008 ,compatible with SQL2000,SQL2005 Software:Free Integrated functions of remote access,interlock,anti-pass,multi-card.,ect V8.81 Version Software	
6	2 Door Access Controller TCP/IP	AC-32Bit302			
7	4 Door Access Controller TCP/IP	AC-32Bit304			
8	Integrated Fire and Alarm Extend Board	AC-32Bit Extend		Four relay alarm output. Connectable to fire signal Input Time delay 0~6000 second adjustable Can control the illegal break-in alarm	

S/N	Product Name	Model	Picture	Technical Parameters	Remark
64 Bit Series (Web control, Mobile App,Barcode, Video Linkage )					
9	Single Door Access Controller TCP/IP	AC-64Bit401		Size:160*106mm Power Box Size:273mm*228mm*65mm Communication Model:TCP/IP Power Supply:12VDC 4-7A Reader Input Format:Wiegand26-40 Card Capacity:40,000 Units Record Capacity:100,000 Units Database available:Access,SQL2008 ,compatible with SQL2000,SQL2005 Software:Free <b>Integrated functions of remote access,interlock,anti-pass,multi-card,.ect</b> <b>Support Video interlinked to take screen shoot (Hivision Camera,4G,Bar Code ect.,</b>	
10	2 Door Access Controller TCP/IP	AC-64Bit402			
11	4 Door Access Controller TCP/IP	AC-64Bit404			
12	Integrated Fire and Alarm Extend Board	AC-64BitExtend		Four relay alarm output. Connectable to fire signal Input Time delay 0~6000 second adjustable Can control the illegal break-in alarm	
Elevator /Cabinet Series					
13	20 Floors Elevator ,Cabinet Access Controller Tcp/Ip	AC-20TCP		Size:160*106mm Power Box Size:273mm*228mm*65mm Communication Model:TCP/IP Power Supply:12VDC 4-7A Reader Input Format:Wiegand26/34 Card Capacity:20,000 Units Record Capacity:100,000 Units Database available:Access,SQL2008 ,compatible with SQL2000,SQL2005 Software:Free Integrated functions of remote access,interlock,anti-pass,multi-card,.ect	
14	20 Floors Elevator Extend	AC-20 extend		<ul style="list-style-type: none"> <li>◆ 300DT20 Extend Board</li> <li>◆ Output: 20 circuit</li> </ul>	

S/N	Product Name	Model	Picture	Technical Parameters	Remark
<b>Stand Alone Unit</b>					
<b>Regular Series</b>					
15	Economical Standalone Unit ID 125KHZ (keypad)	SA-RS1000		Waterproof stand alone unit Material:ABS Plastic Card Capacity:1000cards Card Type :EM card Reading Range:5-8cm Operation Mode:Card, Card+Password Working Voltage:12V DC+-10% Dimension:120*78*22 mm CE /FCC/ROSH Qualify	
16	Standalone Unit (ID 125KHZ keypad)	SA-RS2000		Waterproof stand alone unit Material:ABS Plastic Card Capacity:2000cards Card Type :EM card Reading Range:5-8cm Operation Mode:Card, Card+Password Working Voltage:12V DC+-10% CE /FCC/ROSH Qualify Dimension:108*78*20mm	
17	Touch Screen Stand alone Unit (Keypad with Night vision )	SA-RS1000T		Waterproof stand alone unit Material:ABS Plastic Card Capacity:1000cards Card Type :EM card Reading Range:5-8cm Operation Mode:Card, Card+Password Working Voltage:12V DC+-10% Dimension:121*57*20mm CE /FCC/ROSH Qualify	




S/N	Product Name	Model	Picture	Technical Parameters	Remark		
18	NFC Dual Frequency ID+IC Standalone Unit	SA-RSDUAL		Waterproof stand alone unit Material:ABS Plastic Card Capacity:10000cards Card Type :EM card Reading Range:5-8cm Operation Mode:IC+ID Card, Card+Password Working Voltage:12V DC+-10% Dimension:121*57*20mm			
19	Outdoor Standalone Unit ID 125KHZ wg26	SA-01RSOUT		Waterproof stand alone unit Material:ABS Plastic Card Capacity:16000cards Card Type :EM card Reading Range:5-8cm Operation Mode:Card Working Voltage:12V DC+-10% Dimension:86*86*64mm CE /FCC/ROSH Qualify			
20	Outdoor Standalone Unit ID 125KHZ	SA-02RSOUT		Waterproof stand alone unit Material:ABS Plastic Card Capacity:1000cards Card Type :EM card Reading Range:5-8cm Operation Mode:Card Working Voltage:12V DC+-10% Dimension:86*86*64mm CE /FCC/ROSH Qualify			





S/N	Product Name	Model	Picture	Technical Parameters	Remark
<b>Metal Series</b>					
21	Metalic stand alone unit id 125Khz	SA-MS01LONG		Waterproof stand alone unit Card Capacity:2000cards Card Type :EM card Reading Range:5-8cm Operation Mode:Card, Card+Password Working Voltage:12V DC+-10%	
22	Metalic stand alone unit id 125Khz	SA-MS02		Waterproof stand alone unit Card Capacity:1000cards Card Type :EM card Reading Range:5-8cm Operation Mode:Card, Card+Password Working Voltage:12V DC+-10%	
23	Touch screen stand alone unit id 125Khz Wg26	SA-MS03T		Waterproof stand alone unit Card Capacity8000cards Card Type :EM card Reading Range:5-8cm Operation Mode:Card, Card+Password	
24	Touch screen stand alone unit id 125Khz	SA-MS04T		Waterproof stand alone unit Card Capacity:4000cards Card Type :EM card Reading Range:5-8cm Operation Mode:Card, Card+Password Working Voltage:12V DC+-10% CE /FCC/ROSH Qualify Dimension:115*80*24mm	
25	Metalic Outdoor Waterproof stand alone unit	SA-MS02OUT		Waterproof stand alone unit Card Capacity:2000cards Card Type :EM card Reading Range:5-8cm Operation Mode:Card, Card+Password Working Voltage:12V DC+-10% CE /FCC/ROSH Qualify Dimension:120*76*28mm	







S/N	Product Name	Model	Picture	Technical Parameters	Remark
<b>Wireless Series (Mobile App)</b>					
26	WIFI Standalone Unit Tuta App	SA-01WIFITUYA		Waterproof and anti-disassembly Material:ABS Card Capacity:1000cards Control Type :EM card, APP Reading Range:5-8cm Operation Mode:Card, Card+Password Working Voltage:12V DC+-10%	
27	WIFI Standalone Unit Tuta App	SA-02WIFITUYA		Material:Metal Capacity:2000 Users Control Type :EM card,APP Reading Range:5-8cm Operation Mode:Card, Card+Password	
28	WIFI Standalone Unit Tuta App Fingerprint 3 in 1	SA-03WIFITUYA		Waterproof and anti-disassembly Material:Metal Card Capacity:1000cards Control Type :EM card,Fingerprint,APP Reading Range:5-8cm Operation Mode:Card, Card+Password	
29	Cloud standalone unit IC 13.56MHZ (Bluetooth)	SA-01BT		Material:ABS Card Capacity:1000cards Control Type :EM card,Bluetooth,APP Reading Range:5-8cm Operation Mode:Bluetooth,Card, Card+Password	
30	Cloud standalone unit QR Bar code ,Tcp/ip standalone unit 5 in 1 IC 13.56MHZ	SA-02BT		Material:ABS Card Capacity:1000cards Control Type :EM card,Bluetooth ,Wifi ,bluetooth, Qr code Reading Range:5-8cm Operation Mode:Card, Card+Password	











S/N	Product Name	Model	Picture	Technical Parameters	Remark
<b>Fingerprint Series</b>					
31	Fingerprint stand alone unit ID125KHZ	SA-01FP		Working voltage: DC12V Static current: <100ma Unlocking method: fingerprint, password, IC card Fingerprint type: semi-conductor collection module Storage capacity: 120 fingerprint 120 cards a set of general passwords Reading card distance: 3-5cm	
32	Fingerprint stand alone unit ID 125KHZ Metallic	SA-02FP		Working voltage: DC12V Static current: <100ma Unlocking method: fingerprint, password, IC card Fingerprint type: semi-conductor collection module Storage capacity: 300 fingerprint 10000 cards a set of general passwords Reading card distance: 3-5cm Card reading mode: WG26 output	
33	Fingerprint stand alone unit ID125KHZ ABS	SA-03FP		Power Supply: DC 9-12V < 100mA Read Card Distance: 0-60mm Fingerprint Capacity: 1000 Units Read Card Style:Fingerprint , EM Card Output signal: Wiegand 26 and can work as stand alone unit Size:155(L)×66(W)×28(H)(mm)	
34	Out Door Fingerprint stand alone unit with Remoter	SA-04FP		Power Supply: DC 9-12V < 100mA Read Card Distance: 0-60mm Fingerprint Capacity: 1000 Units EM Card Capacity:2000 Units Read Card Style:Fingerprint , EM Card Output signal: Wiegand 26 and can work as stand alone unit Size:128*48*26mm	




S/N	Product Name	Model	Picture	Technical Parameters	Remark
<b>Face Recognition Series</b>					
35	4.5 inch Dynamic Face Recognition Standalone Unit Tcp/ip Wg26	SA-0145FR		Input voltage:12DC Face store capacity 2000 Units Em card:2000units Password:2000 units Pixel:200W , Communication:TCP/IP	
36	5 inch Dynamic Face Recognition Standalone Unit Tcp/ip Wg26	SA-0150FR		Input voltage:12DC Face store capacity 2000/5000 Units Em card:2000units Password:2000 units Pixel:200W , Communication:TCP/IP Time attendance capacity:100,000 units One group of wiegand 26 signal	
37	7 inch Dynamic Face Recognition Standalone Fingerprint 3 in 1Unit Tcp/ip Wg26	SA-0170FR		Input voltage:12DC Face store capacity 2000 Units Fingerprint:10000 units Em card:2000units Password:2000 units Pixel:200W , Communication:TCP/IP Time attendance capacity:100,000 units One group of wiegand 26 signal	





S/N	Product Name	Model	Picture	Technical Parameters	Remark		
38	Living Object 7 inch Dual Face Recognition Standalone Unit Tcp/ip Wg26 For Turnstile Gate (SDK)	SA-0370FR		Input voltage:12VDC Face store capacity 20000 Units Em card:2000units Password:2000 units Pixel:200W , Communication:TCP/IP Time attendance capacity:100,000 units One group of wiegand 26 signal Communication: 1 unit of RJ45 10M/100M interface 1 unit of Micro SD interface 2 units of switch signal output 1 unit of audio signal output 1 unit of alarm signal input 1 unit of RS485 interface			
39	Living Object Dual Face Recognition Standalone Unit Tcp/ip Wg26 For Turnstile Gate	SA-02FR		Input voltage:12DC Face store capacity:5000 Units Pixel:200W Wiegang26/34 output 1 unit of RJ45 10M/100M interface 2 units of switch signal output 1 unit of audio signal output 1 unit of alarm signal input 1 unit of RS485 interface 1 unit of two door access controller			
<b>RFID Reader</b>							

S/N	Product Name	Model	Picture	Technical Parameters	Remark		
40	RFID Reader Outdoor Waterproof id 125khz	Reader-01		Power Supply: DC 9-12V < 100mA Read Card Distance: 0-60mm Support: ID Card/125KHz Output signal:Wiegand 26bits/Wiegand 34 Size: 102×34×21mm Weight: 150g			
41	RFID Reader	Reader-02		RFID WIEGAND Reader For ID Card Power Supply: DC 9-12V < 100mA Read Card Distance: 0-60mm Support: ID Card/125KHz			
42	RFID ReaderDual Frequency id 125khz +ic13.56mhz	Reader-03Dual		RFID WIEGAND Reader For ID Card Power Supply: DC 9-12V < 100mA Read Card Distance: 0-60mm Support: ID Card/125KHz+IC card13.56mhz			
43	EM Reader	Reader-04Keypad		WG26,EM Card Reader Power supply:DC12V Waterproof Size: 86×86×18 (mm)			
44	HID+EM+MI FARE Card Reader	Reader-05HID		Power Supply: DC 9-12V < 100mA Read Card Distance: 0-60mm Support: HID+EM+MIFARE Card Output signal: Wiegand 26bits/Wiegand 34 Size: 114×73×16mm Weight: 150g			
45	Barcode and IC card All in One Reader	Reader-06Barcode		Power Supply: DC 9-12V < 100mA Read Type:Paper barcode, Screen Barcode, IC card. USB Virtual Keypad.			





S/N	Product Name	Model	Picture	Technical Parameters	Remark
<b>Electric Drop Bolt Lock</b>					
46	2 cable drop bolt lock Mortise	BL-102		Standard Electric Bolt (2-core cable) Type: Fail safe Lock Size: 204×36×42mm Working Voltage: DC 12V±10% Support Door :wooden door/glass door/metal door/ fire-escape door Material: Aluminum/stainless steel Weight: 0.5kg	
47	5 cable drop bolt lock Mortise low temperature with signal output and time delay	BL-105		Standard Electric Bolt (5-core cable) Type: Fail safe Lock Size: 204×36×42mm (NO, NC,COM) Working Voltage: DC 12V±10% Support Door :wooden door/glass door/metal door/ fire-escape door Material: Aluminum/stainless steel Weight: 0.7kg	
48	5 cable drop bolt lock low temperature with signal output and time delay	BL-205Narrow		Standard Electric Bolt (5-core cable) Type: Fail safe Lock Size: 205×35×42mm (NO, NC,COM) Working Voltage: DC 12V±10% Support Door :wooden door/glass door/metal door/ fire-escape door Material: Aluminum/stainless steel Weight: 0.7kg	





S/N	Product Name	Model	Picture	Technical Parameters	Remark		
49	6 cable drop bolt lock low temperature with signal output and time delay	BL-206Narrow		Standard Electric Bolt (6-core cable) Type: Fail Secure Lock Size: 204×36×42mm (NO, NC, COM) Working Voltage: DC 12V±10% Support Door :wooden door/glass door/metal door/ fire-escape door Material: Aluminum/stainless steel Weight: 0.7kg			
50	9 cable drop bolt lock low temperature with signal output and time delay	BL-209Narrow		Standard Electric Bolt (6-core cable) Type: Fail Secure Lock Size: 205×35×42mm (NO, NC, COM) Working Voltage: DC 12V±10% Support Door :wooden door/glass door/metal door/ fire-escape door Material: Aluminum/stainless steel Weight: 0.7kg			
51	Surface Mounted drop bolt lock low temperature with signal output and time delay	BL-304Mounted		Standard Electric Bolt (4-core cable) Type: Fail safe (NO/NC, COM) Working Voltage: DC 12V±10% Support Door :wooden door/glass door/metal door/ fire-escape door Material: Aluminum/stainless steel Weight: 0.7kg			
52	Frameless drop bolt lock with time delay	BL-404 Frameless		Power Supply:12V DC Output contact:NO/NC/COM Time delay adjustable:0,3,6 seconds Suitable for glass door thickness from 8-12mm			
53	Key Electric Bolt with Time Delay	BL-504 Key		Standard Electric Bolt (4-core cable), with door magnet function Type: Fail safe Lock Size: 60L*30W*48H mm Working Voltage: DC 12V±10% Support Door :wooden door/glass door/metal door/ fire-escape door			





S/N	Product Name	Model	Picture	Technical Parameters	Remark		
<b>Electric Strike Lock</b>							
54	Narrow Panel Drop Bolt Strike Lock	SL-102 Narrow		Lock Size: 129×28×34mm Type: Fail safe, can be customized fail secure Working Voltage: DC 12V±10% Support Door: Wooden door/metal door Face plate Housing: Painted steel Material: Aluminum/stainless steel Weight: 0.35 kg			
55	Long Panel Drop Bolt Strike Lock	SL-102 Long		Lock Size: 250×25×31mm Type: Fail Safe, can be customized fail secure Working Voltage: DC 12V±10% Support Door: Wooden door/metal door Face plate Housing: Painted steel Material: Aluminum/stainless steel NO,NC,COM Weight: 0.35 kg			
56	Narrow Panel Drop Bolt Strike Lock with signal feedback	SL-105 Narrow		Lock Size: 129×28×34mm Type: Fail safe, can be customized fail secure Working Voltage: DC 12V±10% Support Door: Wooden door/metal door Face plate Housing: Painted steel Material: Aluminum/stainless steel Weight: 0.35 kg			





S/N	Product Name	Model	Picture	Technical Parameters	Remark		
<b>Magnetic Lock</b>							
180KG Series/ 350-450 LBS							
57	Single Door Electro-Magnetic Lock (180KG)	Mag-180		Type: Fail Safe, without signal feedback U/I: DC12V/300MA Size: L170*W42*H21MM			
58	Single Door Electro-Magnetic Lock (180KG) with signal feedback	Mag-180Signal		Type: Fail Safe, signal feedback U/I: DC12V/300MA Size: L170*W42*H21MM			
59	Two Door Electro-magnetic Lock (180KG×2)	Mag-1802		Type: Fail Safe, without signal feedback U/I: DC12V/300MA Size: L340*W42*H21MM			
60	Two Door Electro-magnetic Lock (180KG×2) with signal feedback	Mag-1802Signal		Type: Fail Safe, signal feedback U/I: DC12V/300MA Size: L340*W42*H21MM			










S/N	Product Name	Model	Picture	Technical Parameters	Remark		
<b>280KG Series/550-650 LBS</b>							
61	One-door Electro-magnetic Lock (280KG)	Mag-280		Type: Fail Safe, without signal output U/I: DC12V/460MA Size: L250*W47*H25MM			
62	One-door Electro-magnetic Lock With signal feedback(280KG)	Mag-280Signal		Type: Fail Safe, with signal output ,with time delay U/I: DC12V/460MA Size: L250*W47*H25MM			
63	Two Door Electro-magnetic Lock (280KG×2)	Mag-2802		Type: Fail Safe, without signal Feedback U/I: DC12V/460MA Size: L500*W47*H25MM			
64	Two Door Electro-magnetic Lock With signal feedback (280KG×2)	Mag-2802Signal		Type: Fail Safe, without signal Feedback U/I: DC12V/460MA Size: L500*W47*H25MM			

S/N	Product Name	Model	Picture	Technical Parameters	Remark		
<b>380KG Series/750-900 LBS</b>							
65	One-door Electro-magnetic Lock (350KG)	Mag-380		Type: Fail Safe, without signal Feedback U/I: DC12V/480MA Size: L285*W55*H29MM			
66	One-door Electro-magnetic Lock LED Indication Light (500KG)	Mag-380Signal		Type: Fail Safe, without signal Feedback U/I: DC12V/480MA Size: L285*W55*H29MM			
<b>Magnetic Lock Bracket</b>							
67	L Type Bracket For 180KG Magnetic Lock	Bracket-Mag180L		Support Door: Wooden door open toward inside, metal door, narrow frame door Door Open Mode: 90 degree one-way,			
68	L Type Bracket For 280KG Magnetic Lock	Bracket-Mag280L		Support Door: Wooden door open toward inside, metal door, narrow frame door Door Open Mode: 90 degree one-way,			




S/N	Product Name	Model	Picture	Technical Parameters	Remark		
69	U Type Bracket For Magnetic Lock of 180KG ,280KG	Bracket-Mag180U		Support Door: Frameless glass door Glass Thickness: 8~5mm Door Open Mode: 180 degree one-way, Weight: 0.242kg Material: Aluminum Size: 105*60*45mm			
70	U Type Bracket For Magnetic Lock of 180KG ,280KG	Bracket-Mag280U		Support Door: Frameless glass door Glass Thickness: 8~5mm Door Open Mode: 180 degree one-way, Weight: 0.242kg Material: Aluminum Size: 105*60*45mm			
71	LZ Type Bracket For Magnetic Lock of 180KG	Bracket-Mag180LZ		Support Door: Wooden door open toward inside, metal door, narrow frame door Door Open Mode:90 degree one-way, Weight:0.718kg Material: Aluminum Size: 270*60*60mm			
72	LZ Type Bracket For Magnetic Lock of 280KG	Bracket-Mag280LZ		Support Door: Wooden door open toward inside, metal door, narrow frame door Door Open Mode:90 degree one-way, Weight:0.718kg Material: Aluminum Size: 270*60*60mm			

S/N	Product Name	Model	Picture	Technical Parameters	Remark
<b>Drop Bolt Lock Bracket</b>					
73	70mm oval hole Bracket	Bracket-BL70		Material:Aluminum Door Type Applicable:Bottom Frameless Glass Door Door-open Mode:180 Degree One-way Open Support Lock: Drop Bolt Type	
74	80mm Round Hole Bracket	Bracket-BL80		Material:Aluminum • Door Type Applicable:Bottom Frameless Glass Door • Door-open Mode:180 Degree One-way Open Support Lock: Drop Bolt Type	
75	U Bracket For Drop Bolt Lock	Bracket-BL U		• Material:stainless steel • Door Type Applicable:Bottom Frameless Glass Door • Door-open Mode:180 Degree One-way Open Support Lock: Drop Bolt Type	
76	ZL Bracket For Drop Bolt Lock	Bracket-BL-ZL		Material:stainless steel Door Type Applicable:Frameless Glass Door Door-open Mode:180 Degree Two-way Open Support Lock: Drop Bolt Type	




S/N	Product Name	Model	Picture	Technical Parameters	Remark
<b>Exit Button</b>					
77	Plastic I RFID Exit Button	Exit-01P		Electric Parameter: Max. current 3A@36VDC Contact Output: COM/NO Material: Plastic Size: 86×86×20mm	
78	Stainless Steel RFID Exit Button	Exit-02SSL		Exit Button(Stainless Steel) Size:86*28CM Electric Parameter:3A 36V DC MAX Working Voltage:12V DC+-10% Output contact:NO/COM Suitable For:Break Glassess in case of emergency Suitable For:Hollow Frame and Embedded Electric Case	
79	Stainless Steel RFID Exit Button	Exit-02SSB		Exit Button(Stainless Steel) Size:86*86CM Electric Parameter:3A 36V DC MAX Working Voltage:12V DC+-10% Output contact:NO/ COM Suitable For:Hollow Frame and Embedded Electric Case	




S/N	Product Name	Model	Picture	Technical Parameters	Remark		
80	RFID Exit Button (Night Vision)	Exit-03NVL		Door Release Button(Night Luminums) Size:86*28CM Electric Parameter:3A 36V DC MAX Working Voltage:12V DC+-10% Output contact:NO/ COM Suitable For:Hollow Frame and Embedded Electric Case			
81	RFID Exit Button (Night Vision)	Exit-03NVB		Door Release Button(Night Luminums) Size:86*86CM Electric Parameter:3A 36V DC MAX Working Voltage:12V DC+-10% Output contact:NO/ COM Suitable For:Hollow Frame and Embedded Electric Case			
82	Aluminum RFID Exit Button	Exit-04ALU		Electric Parameter: Max. current 3A@36VDC Contact Output: COM/NO Material: Aluminum Size: 86*50**20mm			
83	Aluminum RFID Exit Button	Exit-04ALUB		Electric Parameter: Max. current 3A@36VDC Contact Output: COM/NO/NC Material: Aluminum Size: 86*86*20mm			






S/N	Product Name	Model	Picture	Technical Parameters	Remark		
84	Lock Key RFID Exit Button	Exit-05Key		Size:86*86*20mm Electric Parameter:3A/36V Dc max Output contact:NO/NC/COM Suitable for hollow Frame and embeded electric case			
85	Mushroom RFID Exit Button	Exit-06Mushroom		Size:86*86*20mm Electric Parameter:3A/36V Dc max Output contact:NO/NC/COM Suitable for hollow Frame and embeded electric case			
86	Touch RFID Exit Button	Exit-07TB		Exit Button(Touch) Working Voltage:12V DC+-10% Size:86*86*20CM Electric Parameter:3A 36V DC MAX Output contact:NO/NC Suitable For:Hollow Frame and Embeded Electric Case			
87	RFID Exit Button(IR)	Exit-L08IR		Electric Parameter: Max. current 3A@36VDC Contact Output: COM/NO/NC Material: Stainless steel Size: 113×68×30mm			
88	RFID Exit Button(IR)	Exit-B08IR		Electric Parameter: Max. current 3A@36VDC Contact Output: COM/NO/NC Material: Stainless steel Size: 86×86×30mm			





S/N	Product Name	Model	Picture	Technical Parameters	Remark
<b>Emergency Exit Button</b>					
89	Glass Break Emergency Exit Button	Emg-101Glass		Break glass in case of emergency Contact output: NO/NC/COM Material: Plastic Size: 86×86×50mm	
90	Glass Break Double Pole Emergency Exit Button	Emg-102Glass		Double Pole Emergency Exit Button Size:86*86*20CM Electric Parameter:3A 36V DC MAX Working Voltage:12V DC+-10% Output contact:NO/NC/COM Suitable For:Break Glassess in case of emergency	
91	Push Rest Emergency Exit Button Single Pole	Emg-101RT		Emergency Push Exit Button Single Pole Contact output: NO/NC/COM Material: Plastic Size: 86×86×50mm	




S/N	Product Name	Model	Picture	Technical Parameters	Remark
<b>Remoters</b>					
92	2 Button Remote Exit Control (copy /learning type)	RB-102Button		Power Supply:Button Battery Working Current:<=12mA Frequency:Adopt 433MHZ Emission Frequency Option For 315 and other wireless frequency Distance 30-100m Work way:Jog,Self-locking,Interlock	
93	4 Button Remote Exit Control (copy /learning type)	RB-104Button		Power Supply:Button Battery Working Current:<=12mA Frequency:Adopt 433MHZ Emission Frequency Option For 315 and other wireless frequency Distance 30-101m Work way:Jog,Self-locking,Interlock	
94	4 Button Remote Exit Control (copy /learning type)	RB-204Button		Power Supply:Button Battery Working Current:<=12mA Frequency:Adopt 433MHZ Emission Frequency Option For 315 and other wireless frequency Distance 30-105m Work way:Jog,Self-locking,Interlock	

S/N	Product Name	Model	Picture	Technical Parameters	Remark		
95	2 Channel Economical remote set (exit control+remote)	RB-102Set		Power Supply:12V DC Working Current:<=12mA Frequency:Adopt 433MHZ Emission Frequency Option For 315 and other wireless frequency Distance 30-100m Work way:Jog,Self-locking,Interlock			
96	2 Channel Remote set (exit control+remote)	RB-202Set		Power Supply:12V DC Working Current:<=12mA Frequency:Adopt 433MHZ Emission Frequency Option For 315 and other wireless frequency Distance 30-100m Work way:Jog,Self-locking,Interlock			
97	4 Channel Remote set (exit control+remote)	RB-204Set		Power Supply:12V DC Working Current:<=12mA Frequency:Adopt 433MHZ Emission Frequency Option For 315 and other wireless frequency Distance 30-100m Work way:Jog,Self-locking,Interlock			

S/N	Product Name	Model	Picture	Technical Parameters	Remark		
<b>RFID Card</b>							
98	EM White Card	Card-125K		125KHZ, WHITE			
99	Mifare White Card	Card-1356M		13.56MHZ WHITE			
100	Key chain mifare card	Card-1356MKC		Material:ABS Frequency:13.56MHZ			
101	Wrist band Em Card	Card-125kWrist		RFID wrist band 125khz 100			
102	HID CARD	Card-HID		HID CARD FOR 26 34 ACCESS CONTROLLER			
<b>Power Supply</b>							











S/N	Product Name	Model	Picture	Technical Parameters	Remark		
103	Special Power Supply for stand alone unit	Power-1203		Input:220V AC Output:12V DC, 3A/5A Time adjust:1S-10S NO/NC/COM			
104	Power supply with metallic outdoor cover For access controller (Support External connect UPSbattery)	Power-1205		Power supply with metallic cover Input voltage: 220—250VAC (OEM For 110VAC) Output voltage: 12VDC 3/5A can connect with recharge battery and with circuit protection Size:277mm*233mm*66mm Low voltage protection function double panel and durable			
105	Special Power Supply for stand alone unit	PB-1203		Input:220V AC Output:12V DC, 3A/5A Time adjust:1S-15S NO/NC/COM			
106	Power supply with metallic outdoor cover(Support Inner connect UPS battery)	PB-1205Plus		Power supply with metallic cover Input voltage: 220—250VAC (OEM For 110VAC) Output voltage: 12VDC 3/5A can connect with recharge battery and with circuit protection Size:372mm*263mm*70mm Low voltage protection function double panel and durable Battery is not included			

S/N	Product Name	Model	Picture	Technical Parameters	Remark
					






**Shenzhen Sintronic Technology Company Limited ( [Https://sintronictech.com](https://sintronictech.com) )**






Contact:Tim Wu Email:tim@sintronictech.com Mobile/ whatSapp/Wechat:+86-15813805304 Turnstile Gate Department/sintronic-turnstile-gate.com


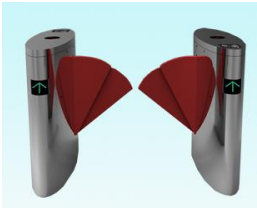

**Turnstile Gate Price List**

Vertical Tripod	Long Bridge Tripod	Flap/Wing Turnstile	Sliding Turnstile	Swing Turnstile
				
Page/30		Page/31-32	Page/33	Page/34-35
Speed Turnstile	Half Height Turnstile	Full Height Turnstile	Supermarket Gate	Fence Gate
				
Page/36	Page/37	Page/37-38	Page/39	Page/40







- 1、Compatible with IC/ID,Magnetic card ,Barcode ,ESD and various Device
- 2、Brake rod stable runing without noisy voice and fast open
- 3、Comply with fire alarm function with emmergency power off function
- 4、Control chip board with memory and accounting function(Optional)
- 5、Standard input and output interface for access control solutions




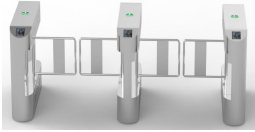
S/N	Product Name	Model	Picture	Technical Parameters	Remark
S/N	Product Name	Model	Picture	Technical Parameters	Remark
<b>Tripod Turnstile</b>					
107	Vertical Tripod Turnstile	TP-01VE		Material:304 Stainless steel Size: 420x333x980mm Input Voltage: 110/220VAC,50HZ Entrance Width:≤550mm Service Life:≥5 million times	
		TP-02VE			
108	Tripod turnstile Octangle	TP-101OCT		Material:304 Stainless steel Size: 1200*280*980mm Input Voltage: 110/220VAC,50HZ Entrance Width:≤550mm Service Life:≥5 million times	
109	Tripod Turnstile Half Cover Arc	TP-101HCA		Material:304 Stainless steel Size: 1200*280*980mm Input Voltage: 110/220VAC,50HZ Entrance Width:≤550mm Service Life:≥5 million times	
110	Tripod Turnstile Whole cover arc	TP-101WCA		Material:304 Stainless steel Size: 1200*280*980mm Input Voltage: 110/220VAC,50HZ Entrance Width:≤550mm Service Life:≥5 million times1	
111		Tripod turnstile Arched	TP-101ARC		Material:304 Stainless steel Size: 1200*280*980mm Input Voltage: 110/220VAC,50HZ Entrance Width:≤550mm Service Life:≥5 million times




S/N	Product Name	Model	Picture	Technical Parameters	Remark		
<b>Flap/Wing Turnstile</b>							
112	Flap Wing Turnstile Gates Octangle	FT-101OCT		Material:304 Stainless steel Size: 1200*280*980mm Input Voltage: 110/220VAC,50HZ Entrance Width:≤550mm Service Life:≥5 million times			
		FT-102OCT					
113	Flap Wing Turnstile Gates Half Cover Arc	FT-101HCA		Material:304 Stainless steel Size: 1200*280*980mm Input Voltage: 110/220VAC,50HZ Entrance Width:≤550mm Service Life:≥5 million times			
		FT-102HCA					
114	Flap Wing Turnstile Gates Sharp Angel	FT-201SA		Material:304 Stainless steel Size: 1200*280*980mm Input Voltage: 110/220VAC,50HZ Entrance Width:≤550mm Service Life:≥5 million times			
		FT-202SA					
115	Flap Wing Turnstile Gates Drum Type	FT-301DRUM		Material:304 Stainless steel Size: 1200*280*980mm Input Voltage: 110/220VAC,50HZ Entrance Width:≤550mm Service Life:≥5 million times			
		FT-302DRUM					
116	Flap Wing Turnstile Gates Egg Type	FT-401EGG		Material:304 Stainless steel Size: 1200*280*980mm Input Voltage: 110/220VAC,50HZ Entrance Width:≤550mm Service Life:≥5million times			
		FT-402EGG					







S/N	Product Name	Model	Picture	Technical Parameters	Remark		
117	Flap Wing Turnstile Gates Butterfly Type	FT-501BTFY		Material:304 Stainless steel Size: 1200*280*980mm Input Voltage: 110/220VAC,50HZ Entrance Width:≤550mm Service Life:≥5 million times			
		FT-502BTFY					
118	Double Flap Wing Turnstile Gates Egg Type	FT-601/2EGG		Material:304 Stainless steel Size: 1200*280*980mm Input Voltage: 110/220VAC,50HZ Entrance Width:≤900mm Service Life:≥5million times			
		FT-602/2EGG					
119	Flap Wing Turnstile Gates Boat Type	FT-701BOAT		Material:304 Stainless steel Size: 1200*280*980mm Input Voltage: 110/220VAC,50HZ Entrance Width:≤550mm Service Life:≥5million times			
		FT-702BOAT					

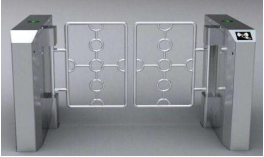











S/N	Product Name	Model	Picture	Technical Parameters	Remark		
<b>Sliding Turnstile</b>							
120	Flap Sliding gate turnstile Octangle	ST-101OCT		Material:304 Stainless steel Size: 1200*330*980mm Input Voltage: 110/220VAC,50HZ Entrance Width:≤550mm Service Life:≥5million times			
		ST-102OCT					
121	Flap Sliding gate turnstile Whole Cover Arc	ST-201WCA		Material:304 Stainless steel Size: 1200*330*980mm Input Voltage: 110/220VAC,50HZ Entrance Width:≤550mm Service Life:≥5million times			
		ST-202WCA					
122	Flap Sliding gate turnstile Drum	ST-301DRUM		Material:304 Stainless steel Size: 1200*330*980mm Input Voltage: 110/220VAC,50HZ Entrance Width:≤550mm Service Life:≥5million times			
		ST-302DRUM					
123	Flap Sliding gate turnstile Rainbow	ST-401RB		Material:304 Stainless steel Size: 1200*330*980mm Input Voltage: 110/220VAC,50HZ Entrance Width:≤550mm Service Life:≥5million times			
		ST-402RB					
124	Flap Sliding gate turnstile Egg	ST-501Egg		Material:304 Stainless steel Size: 1200*330*980mm Input Voltage: 110/220VAC,50HZ Entrance Width:≤550mm Service Life:≥5million times			
		ST-502Egg					
125	Flap Sliding gate turnstile Luxury	ST-601LXY		Material:304 Stainless steel Size: 1200*330*980mm Input Voltage: 110/220VAC,50HZ Entrance Width:≤550mm Service Life:≥5million times			
		ST-602LXY					



S/N	Product Name	Model	Picture	Technical Parameters	Remark		
<b>Swing Turnstile</b>							
126	Swing Turnstile Gates Vertical	SW-101VE		Material:304 Stainless steel Size:420*330*1000MM Input Voltage: 110/220VAC,50HZ Entrance Width:≤850mm Service Life:≥5 million times			
127	Swing Turnstile Gates Octangle	SW-201OCT		Material:304 Stainless steel Size: 1200*280*1000mm Input Voltage: 110/220VAC,50HZ Entrance Width:≤850mm Service Life:≥5 million times			
		SW-202OCT					
128	Swing Turnstile Gates Half Cover Arc	SW-201HCA		Material:304 Stainless steel Size: 1200*280*1000mm Input Voltage: 110/220VAC,50HZ Entrance Width:≤850mm Service Life:≥5million times			
		SW-202HCA					
129	Swing Turnstile Gates Round Arc Gap	SW-201RAG		Material:304 Stainless steel Size: 1200*280*1000mm Input Voltage: 110/220VAC,50HZ Entrance Width:≤850mm Service Life:≥5million times			
		SW-202RAG					







S/N	Product Name	Model	Picture	Technical Parameters	Remark		
130	Swing Turnstile Gates Carve	SW-201CARVE		Material:304 Stainless steel Size: 1400*280*1000mm Input Voltage: 110/220VAC,50HZ Entrance Width:≤650mm Service Life:≥5million times			
		SW-202CARVE					
131	Mini Acrylic Flap Swing Turnstile Gates Whole Cover Arc	SW-301WCA		Material:304 Stainless steel Size: 1200*200*1000 Input Voltage: 110/220VAC,50HZ Entrance Width:≤370mm Service Life:≥5million times			
		SW-302WCA					
132	Mini Acrylic Flap Swing Turnstile Gates Bevel ARC	SW-301BA		Material:304 Stainless steel Size: 1200*200*1000 Input Voltage: 110/220VAC,50HZ Entrance Width:≤370mm Service Life:≥5million times			
		SW-302BA					

S/N	Product Name	Model	Picture	Technical Parameters	Remark		
<b>Speed Turnstile</b>							
133	Speed Turnstile Gates Whole Cover Arc	SP-101WCA		Material:304 Stainless steel Size: 1400*180*1000mm Input Voltage: 110/220VAC,50HZ Entrance Width:≤350mm Service Life:≥5million times			
		SP-102WCA					
134	Speed Turnstile Gates Arched Type	SP-201ARCHED		Material:304 Stainless steel Size: 1400*180*1000mm Input Voltage: 110/220VAC,50HZ Entrance Width:≤350mm Service Life:≥5million times			
		SP-202ARCHED					
135	Speed Turnstile Gates Luxury	SP-301LXY		Material:304 Stainless steel Size: 1400*180*1000mm Input Voltage: 110/220VAC,50HZ Entrance Width:≤350mm Service Life:≥5million times			
		SP-302LXY					
136	Speed Turnstile Gates Round Cylinder	SP-401RC		Material:304 Stainless steel Size: 168*1000mm Input Voltage: 110/220VAC,50HZ Entrance Width:≤350mm Service Life:≥5million times			
137	Drop Arm gate turnstile Octangle	SP-501OCT		Material:304 Stainless steel Size: 1200*200*980mm Input Voltage: 110/220VAC,50HZ Entrance Width:≤600mm Service Life:≥5million times			
		SP-502OCT					
138	Drop Arm gate turnstile Octangle Whole cover flat	SP-601WCF		Material:304 Stainless steel Size: 1200*200*980mm Input Voltage: 110/220VAC,50HZ Entrance Width:≤600mm Service Life:≥5million times			
		SP-602WCF					








S/N	Product Name	Model	Picture	Technical Parameters	Remark		
<b>Half Height Turnstile</b>							
139	Half Height Turnstile	Half-201		SizeMaterial:201 Stainless steel Size: :1500*1200*280mm Input Voltage: 110/220VAC,50HZ Service Life:≥5million times			
140	Half Height Turnstile	Half-304		SizeMaterial:304 Stainless steel Size: :1500*1200*280mm Input Voltage: 110/220VAC,50HZ Service Life:≥5million times			
<b>Full Height Turnstile Gate</b>							
141	One way Full Height Turnstile 90 Degree Head	Full-201H90		SizeMaterial:201 Stainless steel Size: :1630*1500*2300 Input Voltage: 110/220VAC,50HZ Service Life:≥5million times			
142	One way Full Height Turnstile 90 Degree Head	Full-304H90		SizeMaterial:304 Stainless steel Size: :1630*1500*2300 Input Voltage: 110/220VAC,50HZ Service Life:≥5million times			
143	One way Full Height Turnstile 120 degree head	Full-304H120		SizeMaterial:304 Stainless steel Size: :1600*1500*2300 Input Voltage: 110/220VAC,50HZ Service Life:≥5million times			
144	One way Full Height Turnstile Square Head	Full-304HSQ		SizeMaterial:304 Stainless steel Size: :1450*1450*2300 Input Voltage: 110/220VAC,50HZ Service Life:≥5million times			





S/N	Product Name	Model	Picture	Technical Parameters	Remark		
145	2 way Full Height Turnstile 90 Degree	Full2-201H90		SizeMaterial:201 Stainless steel Size: :1500*2300*2300 Input Voltage: 110/220VAC,50HZ Service Life:≥6million times			
146	2 way Full Height Turnstile Square Head	Full2-304HSQ		SizeMaterial:304 Stainless steel Size: :1450*2300*2300 Input Voltage: 110/220VAC,50HZ Service Life:≥5million times			
147	2 way Full Height Turnstile Arched Head	Full2-304ARCHED		SizeMaterial:304 Stainless steel Size: :1300*2300*2200 Input Voltage: 110/220VAC,50HZ Service Life:≥6million times			
148	3 way Full Height Turnstile Arched Head	Full3-304ARCHED		SizeMaterial:304 Stainless steel Size: :1400*2300*2200 Input Voltage: 110/220VAC,50HZ Service Life:≥6million times			





S/N	Product Name	Model	Picture	Technical Parameters	Remark
<b>Supermarket Turnstile</b>					
149	Supermarket Revolving Gates RFID Round Cylinder	SU-101RC		Material:304 Stainless steel Size: 168*1050mm Input Voltage: 110/220VAC,50HZ Entrance Width:≤850mm Service Life:≥5million times	
150	Supermarket Revolving Gates IR Sensor 4 Round Cylinder	SU-104RC		Material:304 Stainless steel Size: 168*1050mm Input Voltage: 110/220VAC,50HZ Entrance Width:≤850mm Service Life:≥5million times	



S/N	Product Name	Model	Picture	Technical Parameters	Remark	
<b>Electric Fence Gate</b>						
151	Electric Fence Gate	Fg-100		<p>Product color: popping gray  Product material: high quality zinc steel  Door opening angle: 90°  Electromagnetic locking force: locking force 320Kg pulling force  Applicable method: can be equipped with door] prohibition system  On] Speed: 3-10 seconds adjustable  Ambient temperature: -10°C~50°C  Scope of application: residential areas, scenic spots, villas, factories, etc.  OEM is available</p>		
						
						
						
						



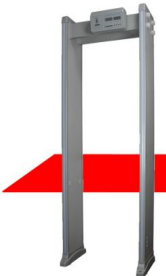



S/N	Product Name	Model	Picture	Technical Parameters	Remark
					
 <p data-bbox="300 580 539 671"> <b>SINTRONIC TECH</b>  =====   <b>MAKE A DIFFERENCE</b> </p>			<p data-bbox="1061 544 1570 576"><b>Security Guard System Price List</b></p> <p data-bbox="797 612 1816 644">Shenzhen Sintronic Technology Company Limited (<a href="https://sintronictech.com">https://sintronictech.com</a>)</p> <p data-bbox="651 683 1973 735">Manager:Tim.Wu/ Email:tim@sintronictech.com Mobile/Whatsapp:0086 15813805304 Metal Detector Department/sintronic-metal-detector.com</p>		
<b>Hand Held Metal Detector</b>		<b>Vehicle Inspection Mirror</b>	<b>Walk Through Metal Detector</b>	<b>X Ray Baggage Scanner</b>	
					
Page/42		Page/43	Page/44-52	Page/53-62	
<p data-bbox="801 1305 1973 1337"><b>ENABLING A SAFER SOCIETY AND SECURITY METAL DETECTOR</b></p>					


S/N	Product Name	Model	Picture	Technical Parameters	Remark		
S/N	Name	Model	Picture	Technical Parameters	Unit Price (USD)		Remark
					1-100PC	>=300 PC	
<b>Hand Held Metal Detector</b>							
152	Hand Held Metal Detector (Super Scanner)	DETECTOR-300HAND		1. Detection sensitivity: detection of RMB one yuan coin, detection distance $\geq 90\text{mm}$ 2. 2. Detection method: sound and light alarm. 3. Power supply: 9v square battery (6F22ND battery), with external charger function (Optional charger and battery) 4. Quiescent current: less than 26mA 5. Working current: sound and light less than 120mA 6. Working temperature: $-5^{\circ}\text{C}$ to $45^{\circ}\text{C}$ 7. Dimensions: 415 * 85 * 45 mm			
153	Hand Held Metal Detector (GP)	DETECTOR-GPHAND		1. Detection sensitivity: detect RMB one yuan coin, the detection distance is $\geq 60\text{mm}$ 2. Alarm mode: sound and light synchronous alarm or vibration alarm. 3. Power supply: 9v square battery (6F22ND battery), external charger function (optional charger and battery)			
154	Hand Held Metal Detector With Fashion design for exhibition	DETECTOR-RHAND		1. Detection sensitivity: detect RMB one yuan coin, the detection distance is $\geq 50\text{mm}$ 2. Alarm mode: sound and light synchronous alarm or vibration alarm. 3. Power supply: 9v square battery (6F22ND battery), with low voltage indication function			
155	Hand Held Metal Detector With Fashion design for exhibition	DETECTOR-EXH		Power Supply: External charging interface or 9Vfold battery (Battery is optional accessory) 1. Power rate: 270 milliwatts 2. Working frequency: 22 kHz 3. Working current: <50 mA 4. Working voltage: 7-9v			


S/N	Product Name	Model	Picture	Technical Parameters	Remark
<b>Bottom Vehicle Inspection Mirror</b>					
156	Vehicle Inspection Mirror with flash light	Mirror -V3R		1. Mirror surface: round 300*300mm acrylic high-strength shatterproof mirror surface, convex 2 times magnification effect, 1/2 the weight of ordinary glass mirror surface of the same size, with certain toughness, not easy to break, safe and durable, brightness and glass mirror surface different. Clamp-in fully enclosed round mirror with painted iron bottom can effectively prevent damage to the mirror caused by collision	
157	Vehicle Inspection Mirror with flash light	Mirror -V3		1. Mirror surface: round 300*300mm acrylic high-strength shatterproof mirror surface, convex 2 times magnification effect, 1/2 the weight of ordinary glass mirror surface of the same size, with certain toughness, not easy to break,	
158	Vehicle Inspection Mirror with camera	Mirror -V2		1. Mirror surface: round 200*200mm acrylic high-strength shatterproof mirror surface, convex 2 times magnification effect, 1/2 the weight of ordinary glass mirror surface of the same size, with certain toughness, not easy to break, safe and durable, brightness and glass mirror surface different.	
159	Visual inspection mirror under vehicle	Mirror -V3S		1. Product name: visual inspection mirror under vehicle 2. Working voltage: DC12V 3. Model: V3S 4. Working current: 220MA 5. Supplementary light source: bright white LED	

S/N	Product Name	Model	Picture	Technical Parameters	Remark
<b>Walk Through Metal Detector</b>					
Single Zone Walk Through Metal Detector					
160	Economical Single Zone Walk Through Metal Detector	DF-001		<p>1. Detection procedure: level sensitivity adjustment, which can meet the needs of different occasions.</p> <p>2. Personnel passing rate: more than 40 person-times per minute.</p> <p>3. Power supply: 110-240V AC, 50/60Hz, power consumption: ≤18W.</p> <p>4. Testing standard: one yuan coin</p> <p>11. Display mode: digital tube display</p> <p>5. Working environment: -10℃~45℃, ≤ 95%RH.</p>	
6 Zone Walk Through Metal Detector					
161	Economical 6 Zone Walk Through Metal Detector	DF-006		<p>1. Detection procedure: level sensitivity adjustment, which can meet the needs of different occasions.</p> <p>2. Personnel passing rate: more than 40 person-times per minute.</p> <p>3. Power supply: 110-240V AC, 50/60Hz, power consumption: ≤18W.</p> <p>4. Testing standard: one yuan coin</p> <p>5. Display mode: 6-zone digital tube display</p> <p>6. Working environment: -10℃~45℃, ≤ 95%RH.</p>	

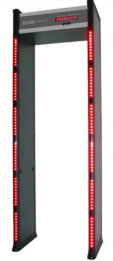
S/N	Product Name	Model	Picture	Technical Parameters	Remark		
162	Lighting 6 Zone Walk Through Metal Detector	DF-006LED		<p>1. Detection procedure: level sensitivity adjustment, which can meet the needs of different occasions.</p> <p>2. Personnel passing rate: more than 40 person-times per minute.</p> <p>3. Power supply: 110-240V AC, 50/60Hz, power consumption: ≤18W.</p> <p>4. Testing standard: one yuan coin</p> <p>5. Display mode: 6-zone digital tube display</p> <p>6. Working environment: -10℃~45℃, ≤ 95%RH.</p>			
163	Camera Interlinked 6 Zone Walk Through Metal Detector	DF-006CAMERA		<p>Power Supply: 220V/110V</p> <p>Frequency:6.99-11khz</p> <p>Work Enviroment: -20℃ + 55℃</p> <p>Power:&lt;=30w</p> <p>Body size:2220*850*500mm</p> <p>Passage Width:2000*700*500mm</p> <p>Alarm Indication:Audio and Vibration at the same time.</p> <p>Display Panel:Hight quality digital tube with person number accessaccount</p> <p>6 Zone detect sensibility class adjust</p>			
164	Luxury 6 Zone Digital Display Walk Through Metal Detector	DF-006LUXURY		<p>Power Supply: 220V/110V</p> <p>Frequency:6.99-11khz</p> <p>Work Enviroment: -20℃ + 55℃</p> <p>Power:&lt;=30w</p> <p>Body size:2210*835*500mm</p> <p>Passage Width:715mm</p> <p>Alarm Indication: Aarm Lightening ,Alarm vocie</p> <p>Display Panel:Hight quality digital tube with person number accessaccount</p> <p>6 Zone detect sensibility class adjust</p>			


S/N	Product Name	Model	Picture	Technical Parameters	Remark
12 ZONE Walk Through Metal Detector					
165	12 Zone Walk Through Metal Detector	DF-012LUXURY		Power Supply: 220V/110V Frequency:6.99-11khz Work Enviroment: -20℃ + 55℃ Power:<=30w Body size:2210*835*500mm Passage Width:715mm Alarm Indication: Aarm Lightening ,Alarm vocie Display Panel:High quality digital tube with person number accessaccount 6 Zone detect sensibility class adjust	
18 ZONE Walk Through Metal Detector					


S/N	Product Name	Model	Picture	Technical Parameters	Remark		
166	Economical 18 Zone Walk Through Metal Detector	DETECTOR-18DF ECONOMICAL		<p>1. Detection procedure: level sensitivity adjustment, which can meet the needs of different occasions.</p> <p>2. Personnel passing rate: more than 40 person-times per minute.</p> <p>3. Power supply: 110-240V AC, 50/60Hz, power consumption: ≤18W.</p> <p>4. Testing standard: one yuan coin</p> <p>5. Display mode: 18-zone digital tube display</p> <p>6. Working environment: -10℃~45℃, ≤ 95%RH.</p>			


S/N	Product Name	Model	Picture	Technical Parameters	Remark		
167	18 Zone Walk Through Metal Detector with led Lighting	DF-018LED		<p>1. Detection procedure: level sensitivity adjustment, which can meet the needs of different occasions.</p> <p>2. Personnel passing rate: more than 40 person-times per minute.</p> <p>3. Power supply: 110-240V AC, 50/60Hz, power consumption: ≤18W.</p> <p>4. Testing standard: one yuan coin</p> <p>5. Display mode: 18-zone 6-inch large LCD display</p> <p>6. Working environment: -10℃~45℃, ≤ 95%RH.</p>			
33 ZONE Walk Through Metal Detector							





S/N	Product Name	Model	Picture	Technical Parameters	Remark		
168	33 Zone Walk Through Metal Detector	DF-033		<p>1. Detection procedure: level sensitivity adjustment, which can meet the needs of different occasions.</p> <p>2. Personnel passing rate: more than 40 person-times per minute.</p> <p>3. Power supply: 110-240V AC, 50/60Hz, power consumption: ≤18W.</p> <p>4. Testing standard: one yuan coin</p> <p>5. Display mode: 33-zone 2.5-inch small LCD screen</p> <p>6. Working environment: -10℃~45℃, ≤ 95%RH.</p>			
45 Zone Walk Through Metal Detector							


S/N	Product Name	Model	Picture	Technical Parameters	Remark		
169	45 Zone Walk Through Metal Detector 400 Level	DF-045		<p>1. Detection procedure: level sensitivity adjustment, which can meet the needs of different occasions.</p> <p>2. Personnel passing rate: more than 40 person-times per minute.</p> <p>3. Power supply: 110-240V AC, 50/60Hz, power consumption: ≤18W.</p> <p>4. Testing standard: one yuan coin</p> <p>5. Display mode: 6-inch large LCD display in 45 areas</p> <p>6. Working environment: -10℃~45℃, ≤95%RH.</p> <p>7. Channel size: 2000 (height) * 700 (width) * 600 (depth) mm</p>			
Thermal Imaging Walk Through Metal Detector							


S/N	Product Name	Model	Picture	Technical Parameters	Remark		
170	11.6 inch thermal imaging walk through metal detector	DF-116THERMAL		<p>Input power: AC85 ~ 264V/50Hz.            Standing power consumption: w 18W, ultra -low power consumption, low radiation. Frequency: 14 frequency bands.            Working environment: -20 °C — +45 °C.            Partition function: The location of the detection area accurately judge the location of metal items.            Scope of sensitivity adjustment: The sensitivity is 255-level adjustable, level 0-255            Alarm function: Sound and light alarm at the same time, and can record the number of alarms 9999 times            Anti -interference force: digital circuit design, leak -proof report, infrared anti -disturbance, strong anti -external interference ability.</p>			

S/N	Product Name	Model	Picture	Technical Parameters	Remark		
171	21.5 inch thermal imaging walk through metal detector	DF-215THERMAL		<p>Input power: AC85 ~ 264V/50Hz.            Standing power consumption: w 18W, ultra -low power consumption, low radiation. Frequency: 14 frequency bands.            Working environment: -20 °C — +45 °C.            Partition function: The location of the detection area accurately judge the location of metal items.            Scope of sensitivity adjustment: The sensitivity is 255-level adjustable, level 0-255            Alarm function: Sound and light alarm at the same time, and can record the number of alarms 9999 times            Anti -interference force: digital circuit design, leak -proof report, infrared anti -disturbance, strong anti -external interference ability.</p>			
X Ray Baggage Scan Machine							


S/N	Product Name	Model	Picture	Technical Parameters	Remark
172	X Ray Baggage Scan Machine	X RAY-5030A		<p>Basic parameters  Channel size: 505*305mm  (width*height)  Power belt speed: 0.22m/s  Portal load: 100kg (uniform load)  Passage: &gt; 10mm steel plate  Line split force:&gt; 38AWG  Space resolution: horizontal/vertical φ  1.0mm</p> <p>X -ray source  Control interface: Simulation interface  Tube voltage: 80kV (adjustable)  Tube current: 0.6 ~ 1.2ma (adjustable)  Cooling method: sealing oil and cooling,  industrial fan cooling  Work Zhou Ming: 100 %, no top heat  Protection function: over pressure,  overcurrent, over -temperature  protection                      Radiation safety  index  Dose rate: &lt;0.5 μgy/h (5cm from the  shell)  Single dose: &lt;1.0 μgy  Safety: Safety of film, chip, and  electronic products  Radiation Protection: The passage and  export of the channel use 0.5mmpb dual  -layer  Environmental protection lead curtain  protection, the raw body uses 2 to 6mm  lead plate protection to ensure that the  peripheral radiation of the equipment  meets national security standards</p>	


S/N	Product Name	Model	Picture	Technical Parameters	Remark		
173	X Ray Baggage Scan Machine	X RAY-5030C		<p>Power belt speed: 0.22m/s  Portal load: 120kg (evenly load)  Passage:&gt; 38mm steel plate  Line split force:&gt; 38AWG  Space resolution: horizontal/vertical φ  1.0mm</p> <p>X -ray source  Control interface: Simulation interface  Tube voltage: 140 ~ 160kV (adjustable)  Pipe current: 0.6 ~ 12mA (adjustable)  Cooling method: sealing oil and cooling,  industrial fan cooling  Work Zhou Ming: 100 %, no top heat  Protection function: over pressure,  overcurrent, over -temperature  protection      Radiation safety index  Dose rate: &lt;0.5 μgy/h (5cm from the  shell)  Single dose: &lt;1.0 μgy  Safety: Safety of film, chip, and  electronic products  Basic parameters  Channel size: 505*305mm  (width*height)  Radiation protection: The entrance and  export of the channel adopt a 0.5mmpb  double layer, environmentally friendly  lead curtain protection, and the main  body uses 2 to 6mm lead plate  protection to ensure that the peripheral  radiation of the equipment meets  national security standards</p>			


S/N	Product Name	Model	Picture	Technical Parameters	Remark		
174	X Ray Baggage Scan Machine	X RAY-6550A		<p>Basic parameters  Channel size: 655*505mm  (width*height)  Power belt speed: 0.22m/s  Portal load: 120 (uniform load)  Passage:&gt; 38mm steel plate  Line split force:&gt; 38AWG  Space resolution: horizontal/vertical φ  1.0mm</p> <p>X -ray source  Control interface: Simulation interface  Tube voltage: 140 ~ 160kV (adjustable)  Pipe current: 0.6 ~ 12mA (adjustable)  Cooling method: sealing oil and cooling,  industrial fan cooling  Work Zhou Ming: 100 %, no top heat  Protection function: over pressure,  overcurrent, over -temperature  protection                      Radiation safety  index  Dose rate: &lt;0.5 μgy/h (5cm from the  shell)  Single dose: &lt;1.0 μgy  Safety: Safety of film, chip, and  electronic products  Radiation protection: The entrance and  export of the channel adopt a 0.5mmpb  double layer, environmentally friendly  lead curtain protection, and the main  body uses 2 to 6mm lead plate  protection to ensure that the peripheral</p>			


S/N	Product Name	Model	Picture	Technical Parameters	Remark		
175	X Ray Baggage Scan Machine	X RAY-6550C		<p>Basic parameters  Channel size: 655*505mm  (width*height)  Power belt speed: 0.22m/s  Portal load: 100kg (uniform load)  Passage:&gt; 38mm steel plate  Line split force:&gt; 38AWG  Space resolution: horizontal/vertical φ  1.0mm</p> <p>X -ray source  Control interface: Simulation interface  Tube voltage: 80kV (adjustable)  Tube current: 0.6 ~ 1.2ma (adjustable)  Cooling method: sealing oil and cooling,  industrial fan cooling  Work Zhou Ming: 100 %, no top heat  Protection function: over pressure,  overcurrent, over -temperature  protection      Radiation safety index  Dose rate: &lt;0.5 μgy/h (5cm from the  shell)  Single dose: &lt;1.0 μgy  Safety: Safety of film, chip, and  electronic products  Radiation protection: The entrance and  export of the channel adopt a 0.5mmpb  double layer, environmentally friendly  lead curtain protection, and the main  body uses 2 to 6mm lead plate  protection to ensure that the peripheral  radiation of the equipment meets  national security standards</p>			





S/N	Product Name	Model	Picture	Technical Parameters	Remark		
176	X Ray Baggage Scan Machine with single display and operation desk	X RAY-8065A		<p>Basic parameters  Channel size: 805*655mm (width*height)  Power belt speed: 0.22m/s  Passage load: 200kg (uniform load)  Passage:&gt; 38mm steel plate  Line split force:&gt; 38AWG  Space resolution: horizontal/vertical φ 1.0mm</p> <p>X -ray source  Control interface: Simulation interface  Tube voltage: 140kV (adjustable)  Tube current: 0.6 ~ 1.2ma (adjustable)  Cooling method: sealing oil and cooling, industrial fan cooling  Work Zhou Ming: 100 %, no top heat  Protection function: over pressure, overcurrent, over -temperature protection      Radiation safety index  Dose rate: &lt;0.5 μgy/h (5cm from the shell)  Single dose: &lt;1.0 μgy  Safety: Safety of film, chip, and electronic products  Radiation protection: The entrance and export of the channel adopt a 0.5mmpb double layer, environmentally friendly lead curtain protection, and the main body uses 2 to 6mm lead plate protection to ensure that the peripheral radiation of the equipment meets national security standards</p>			

S/N	Product Name	Model	Picture	Technical Parameters	Remark		
177	X Ray Baggage Scan Machine with 2 display and operation desk	X RAY-8065C		<p>Basic parameters  Channel size: 805*655mm  (width*height)  Power belt speed: 0.22m/s  Passage load: 200kg (uniform load)  Passage:&gt; 38mm steel plate  Line split force:&gt; 38AWG  Space resolution: horizontal/vertical φ  1.0mm</p> <p>X -ray source  Control interface: Simulation interface  Tube voltage: 140 ~ 160kV (adjustable)  Tube current: 0.6 ~ 1.2ma (adjustable)  Cooling method: sealing oil and cooling,  industrial fan cooling  Work Zhou Ming: 100 %, no top heat  Protection function: over pressure,  overcurrent, over -temperature  protection                      Radiation safety  index  Dose rate: &lt;0.5 µgy/h (5cm from the  shell)  Single dose: &lt;1.0 µgy  Safety: Safety of film, chip, and  electronic products  Radiation protection: The entrance and  export of the channel adopt a 0.5mmpb  double layer, environmentally friendly  lead curtain protection, and the main  body uses 2 to 6mm lead plate  protection to ensure that the peripheral  radiation of the equipment meets  national security standards</p>			






S/N	Product Name	Model	Picture	Technical Parameters	Remark		
178	X Ray Baggage Scan Machine with single display and operation desk	X RAY-10080A		<p>Basic parameters  Channel size: 1005*805mm  (width*height)  Power belt speed: 0.22m/s  Passage load: 200kg (uniform load)  Passage:&gt; 38mm steel plate  Line split force:&gt; 38AWG  Space resolution: horizontal/vertical φ  1.0mm</p> <p>X -ray source  Control interface: Simulation interface  Tube voltage: 140kV (adjustable)  Tube current: 0.6 ~ 1.2ma (adjustable)  Cooling method: sealing oil and cooling,  industrial fan cooling  Work Zhou Ming: 100 %, no top heat  Protection function: over pressure,  overcurrent, over -temperature  protection      Radiation safety index  Dose rate: &lt;0.5 µgy/h (5cm from the  shell)  Single dose: &lt;1.0 µgy  Safety: Safety of film, chip, and  electronic products  Radiation protection: The entrance and  export of the channel adopt a 0.5mmpb  double layer, environmentally friendly  lead curtain protection, and the main  body uses 2 to 6mm lead plate  protection to ensure that the peripheral  radiation of the equipment meets  national security standards</p>			





S/N	Product Name	Model	Picture	Technical Parameters	Remark		
179	X Ray Baggage Scan Machine with 2 display and operation desk	X RAY-10080C		<p>Basic parameters  Channel size: 1005*805mm (width*height)  Power belt speed: 0.22m/s  Passage load: 200kg (uniform load)  Passage:&gt; 38mm steel plate  Line split force:&gt; 38AWG  Space resolution: horizontal/vertical φ 1.0mm</p> <p>X -ray source  Control interface: Simulation interface  Tube voltage: 140 ~ 160kV (adjustable)  Tube current: 0.6 ~ 1.2ma (adjustable)  Cooling method: sealing oil and cooling, industrial fan cooling  Work Zhou Ming: 100 %, no top heat  Protection function: over pressure, overcurrent, over -temperature protection      Radiation safety index  Dose rate: &lt;0.5 μgy/h (5cm from the shell)  Single dose: &lt;1.0 μgy  Safety: Safety of film, chip, and electronic products  Radiation protection: The entrance and export of the channel adopt a 0.5mmpb double layer, environmentally friendly lead curtain protection, and the main body uses 2 to 6mm lead plate protection to ensure that the peripheral radiation of the equipment meets national security standards</p>			

S/N	Product Name	Model	Picture	Technical Parameters	Remark		
180	X Ray Baggage Scan Machine with single display and operation desk	X RAY-100100A		Channel size: 1000mm*1000mm Dimensions: 3600mm*1305mm*1950mm X -ray generator: 140kv 0.5ma Transfer speed: 0.22m/s Pass load: 100kg Linear debate rate: 38AWG (0.102mm) Space dividend rate: horizontal/vertical: 1.0mm Trusted score: 32AWG (0.203) Patition: 15mm steel plate Discard dosage: <0.5 µgy Single dose: <5 µgy Organic material division rate: none Inorganic split rate: None Noise level: <60db Power consumption of the whole machine: 0.5kW Weight: 750kg Work power: 220VAC ± 10 % 50Hz ± 3Hz Working environment temperature: 5 °C ~ 40 °C Storage temperature: -10 °C ~ 60 °C			

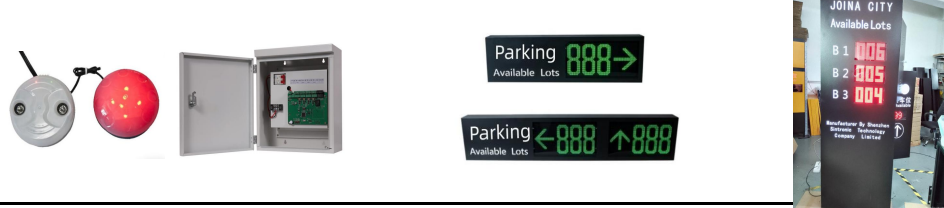





S/N	Product Name	Model	Picture	Technical Parameters	Remark		
181	X Ray Baggage Scan Machine with 2 display and operation desk	X RAY-100100C		<p>Channel size: 1000mm*1000mm  Dimensions:  3600mm*1305mm*1950mm  X -ray generator: 140kv 0.5ma  Transfer speed: 0.22m/s  Pass load: 100kg  Linear debate rate: 38AWG (0.102mm)  Space dividend rate: horizontal/vertical:  1.0mm  Trusted score: 32AWG (0.203)  Patition: 15mm steel plate  Discard dosage: &lt;0.5 µgy  Single dose: &lt;5 µgy  Organic material division rate: none  Inorganic split rate: None  Noise level: &lt;60db  Power consumption of the whole  machine: 0.5kW  Weight: 750kg  Work power: 220VAC ± 10 % 50Hz ±  3Hz  Working environment temperature: 5 °  C ~ 40 °C  Storage temperature: -10 °C ~ 60 °C</p>			







ENJOY A SMARTER SECURITY METAL DETECTOR SYSTEM






S/N	Product Name	Model	Picture	Technical Parameters	Remark
 <b>SINTRONIC TECH</b> ===== <b>MAKE A DIFFERENCE</b>			<b>Parking Guidance System Price List 2024</b>		
			Shenzhen Sintronic Technology Company Limited( <a href="https://sintronictech.com">https://sintronictech.com</a> )		
			Manager:Tim.wu Mobile/Whatsapp:0086 15813805304 parking system department- <a href="https://sintronicparking.com">https://sintronicparking.com</a>		
Integrated Parking Guidance System			Split Parking Guidance System		
					
Page/64-65			Page/66-67		
OEM 3 in 1 parking guidance system			Camera base parking guidance system		
					
Page/68-70			Page/71-72		




S/N	Product Name	Model	Picture	Technical Parameters	Remark
<b>ENABLING A SAFER SOCIETY AND SMARTER PARKING GUIDANCE</b>					
NO.	Product Name	Model	Picture	Technical Parameters	Remark
<b>Integrated Ultrasonic Parking Guidance System</b>					
182	Integrated Ultrasonic Detector	Parking-ID201		Front-mounted ultrasonic Detector for car bay status detection, including indicator lights Working power:24V	
183	Central controller With power box	Parking-64 Central		Independent offline control and one unit of main control box can support max 64 units of nod control box connection to the system Working power:24V Communication:Tcp/ip,RS485	
184	Nod Controller with Power Box	Parking-60 Nods		1.Each unit of nod controller have 4 units rs485 wiring line and each unit of nod controller advise to wire not max than 60 pcs detector. 2.Working Power:24V Communication:RS485	
185	Single Direction Indoor LED Display	Parking-201Screen		Single Direction Indoor led display for integrated parking guidance system Lighting box can be customized	





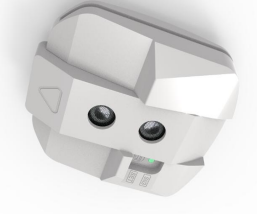

S/N	Product Name	Model	Picture	Technical Parameters	Remark
186	2 Directions Indoor LED Display	Parking-202Screen		2 Directions Indoor led display for integrated parking guidance system Lighting box can be customized	
187	Outdoor Led display 3FLOORS(B1,B2,B3)	Parking-203ODScreen		Size: (can be customized according to customer requirements) 1.One-Direction 1065*270*90mm Power input: AC 110~240V 2 directions 1370*270*90mm Power consumption: ≤15W (one-way) 3 directions 1690*270*90mm Environmental humidity: 30%--90% (relative humidity) Communication: RS485 Light source: Red/green LED lamp Beads communication distance: ≤300m SET	
188	Remoter for ultrasonic sensor setting	Parking-Remoter		1.Setting and read the detector address, distance and mode, saving time and money 2.Detector distance to ground>1.1Meter	
189	RS485 Terminal for sensor connection	Parking-485 Terminal		485 wiring terminal board The resistance value of 100 meters cannot exceed 10 ohms	
190	RS485 Tool for led display setting	Parking-485 LEDTool		Set the address code and direction of the display screen, and also set the probe parameters	
191	Software	Parking-Software		Integrated Parking Guidance Software	




S/N	Product Name	Model	Picture	Technical Parameters	Remark
<b>Split parking guidance system(1 To 1)</b>					
192	Split Type Ultrasonic Detector	Parking-SD101		Front-mounted ultrasonic detector, indicator light is separate, one for each parking space Working Power:24V	
193	Indicator For Split Type Ultrasonic Detector	Parking-IDCSD101		Indicator Light For Split Type Ultrasonic Detector	
194	Central controller With box	Parking-64 Central		Independent offline control and one unit of main control box can support max 64 units of nod control box connection to the system Working power:24V Communication:Tcp/ip,RS485	
195	NOD Control Box	Parking-60 Nod		Each can be connected to 32 units parking bays	
196	Single Direction Indoor Scree	Parking-101Screen		Single Direction Indoor led display for split parking guidance system Lighting box can be customized	
197	2 Direction Indoor Screen	Parking-102Screen		2 Directions Indoor led display for integrated parking guidance system Lighting box can be customized	





S/N	Product Name	Model	Picture	Technical Parameters	Remark
198	OUTDOOR SCREEN 3 FLOORS(B1,B2,B3)	Outdoor Led Display 3 FLOORS(B1,B2,B3)		Size: (can be customized according to customer requirements) 1.One-Direction 1065*270*90mm Power input: AC 110~240V 2 directions 1370*270*90mm Power consumption: ≤15W (one-way) 3 directions 1690*270*90mm Environmental humidity: 30%--90% (relative humidity) Communication: RS485 Light source: Red/green LED lamp Beads communication distance: ≤300m SET	
199	Remoter for ultrasonic sensor	Parking-Remoter		1.Setting and read the detector address, distance and mode, saving time and money 2.Detector distance to ground>1.1Meter	
200	RS485 Terminal	Parking-485 Terminal		485 wiring terminal board The resistance value of 100 meters cannot exceed 10 ohms	
201	LED Display RS485 Tool	Parking-485 LEDTool		Set the address code and direction of the display screen, and also set the probe parameters	
202	Software	Parking-Software		Split Parking guidance software	

S/N	Product Name	Model	Picture	Technical Parameters	Remark
<b>3 In 1 Parking guidance system</b>					
203	OEM Detector For 3 In 1 Parking Guidance System	Parking-Sps301		Body shell structure/material: ABS plastic Body color: white Dimensions: 98mmx80mmx37mm Communication mode: RS485 Working voltage: DC12V Average power consumption: 30mA	
204	OEM Indicator For 3 In 1 Detector	Parking-Idc/Sps301		High -brightly shot hemisphere LED two -color indicator (gem red/emerald green) Dimensions of the shape: diameter 70mmx60mm Working voltage: DC12V Average power consumption: 30mA	
205	OEM Circuit Board	Circuit-301		OEM circuit board for 3 detector share 1 indicator output and input signal control	












S/N	Product Name	Model	Picture	Technical Parameters	Remark	
206	OEM Controller For 3 in 1 Parking System	Parking-40 Area		<p>Properties: Built -in information prompt display, real -time fault processing and data isolation function. The system adopts the latest leading Internet communication technology to achieve precise guidance instructions of points and points.</p> <p>Formula setting</p> <p>Working voltage: AC220-240V</p> <p>Output power: DC12V/ 8A</p> <p>Communication method: RS485</p> <p>Max support 64 units detector for each area controller and usually advised 40 units detector wiring to one area controller</p>		
207	OEM Single Direction Indoor Led Display	Parking-301Screen		<p>Body structure and material: special#25 champagne brushed all -aluminum alloy fuselage</p> <p>Panel material:#5 Black all -tempered glass panel</p> <p>Dimensions: 860mmx210mmx110mm</p> <p>Single weight: about 10kg</p> <p>Communication:RS485</p> <p>Power Supply:220-240V</p>		


S/N	Product Name	Model	Picture	Technical Parameters	Remark	
208	OEM Outdoor LED Display	Parking- 303ODScreen		<p>Size: (can be customized according to customer requirements)</p> <p>One-way 1065*270*90mm 240V</p> <p>Two-way 1370*270*90mm Power consumption: ≤15W (one-way)</p> <p>Three-way 1690*270*90mm Environmental humidity: 30%--90% (relative humidity)</p> <p>Appearance material: cold plate laser cutting and baking varnish Communication method: RS485 Light source: Red/green LED lamp beads Communication distance: ≤300m SET</p>		
209	RS485 to Usb Converter	Parking-301Converter		RS485 to Usb Converter For Signal Communication to pc software		




S/N	Product Name	Model	Picture	Technical Parameters	Remark
<b>Camera base video parking guidance system</b>					
210	Camera Detector	Vparking-401CD		Camera Detector Built-in license plate recognition algorithm, can identify 1-3 parking Spaces, built-in LED indicator traffic light two-color display Power Supply:24V	
211	Indicator For Camera Detector	Vparking-IDC/401CD		indicator 1 video detector can be connected to 1-3 parking indicator lights, RS485	
212	Video Parking Controller With Power Box	Vparking-16 Area		Video parking with power box 220v-240v One parking guidance controller device box can connect to 1-16 camera detectors	


S/N	Product Name	Model	Picture	Technical Parameters	Remark	
213	Single Direction Indoor Display Screen	Vparking-401Screen		770 * 210 * 80mm, including empty space light box Light box font is customizable		
214	2Direction Indoor Display Screen	Vparking-402Screen		1080*210*80mm, including empty space light box Light box font is customizable		
215	2Direction Indoor Display Screen	Vparking-403Screen		1460*210*80mm, including empty space light box Light box font is customizable		
216	car serching kiosk	Vparking-Kiosk		car serching kiosk 21.5"touch screen, TCP / IP interface. Installed on the stairs and at the elevator openings. One unit is expected to be installed on each layer of 8 floors		





S/N	Product Name	Model	Picture	Technical Parameters	Remark
					
 <b>SINTRONIC TECH</b> ===== <b>MAKE A DIFFERENCE</b>		<b>Parking Ticketing System Price List</b> (email:tim@sintronictech.com https://sintronictech.com)			
		Manager:Tim.Wu Mobile/whatSapp,Wechat/0086 15813805304 Parking system department:https://sintronicparking.com			
<b>LPR Car Plate Recognition Camera</b>			<b>RFID Parking Ticketing Controller</b>	<b>RFID Parking Ticketing Reader</b>	
					
Page/74			Page/75		
<b>UHF Reader(RFID Long Range)</b>		<b>Barrier Boom Gate</b>	<b>Parking Ticket Box</b>		
					
Page/76-79		Page/80-82	Page/83		
<b>Parking Ticketing Card Dispenser/Collector</b>		<b>Parking Ticketing Payment Machine</b>	<b>Parking Ticketing Spare Parts(Loop/card distributor/uhf card,windshield sticker)</b>		
					
Page/83		Page/84	Page/84-86		


S/N	Product Name	Model	Picture	Technical Parameters	Remark
S/N	Product Name	Model	Picture	Technical Parameters	Remark
<b>LPR Car Plate Recognition Camera</b>					
217	Car plate recognition Camera	PS-01CAMERA		<ul style="list-style-type: none"> <li>◇ Ultra HD 4 million pixels (1440P);</li> <li>◇ All-day vehicle capture rate is higher than 99.9%;</li> <li>◇ All-day license plate recognition rate is higher than 95%;</li> <li>◇ Support cloud control function for parameter configuration, video preview and remote upgrade;</li> <li>◇ Adopt video compression technology H.264 for video encoding, and capture frames using JPEG encoding; .</li> <li>◇ Support three detection methods: coil detection, video detection, coil detection + video detection ;</li> <li>◇ Support OSD information overlay function, support video 1 picture overlay watermark;</li> <li>◇ Support white list import and export function, can do fuzzy matching on white list;</li> <li>Support OEM For Global Country</li> <li>◇ Support configuration file import backup ;</li> <li>◇ Support manual key reset, you can restore the initial IP address, user name, password and restore the default factory configuration with one click ;</li> <li>◇ Support cloud intercom ;</li> <li>◇ Support secondary development ;</li> </ul>	




S/N	Product Name	Model	Picture	Technical Parameters	Remark		
<b>RFID Parking Ticketing Controller</b>							
218	RFID Parking Ticketing Controller	PS-01RFID TCP300		Working voltage: DC12V Working environment temperature: -25°C-60°C Relative humidity: =< 95% Card reader interface: WG26 Communication interface: RS485 Communication baud rate: 4800b/s Maximum communication distance: 1200 meters User Information: 6000 Offline Storage Record Capacity: 10000 Card type: optional IC, ID Card reading distance: 5 ~ 10cm (IC card)			
<b>Parking Ticketing Reader</b>							
219	Entry Station RFID Reader	PS-01Reader/Ety		Entry Station RFID Parking Ticketing Reader IC Type 13.56Mhz			
220	Exit Station RFID Reader	PS-01Reader/Ext		Exit Station RFID Parking Ticketing Reader IC Type 13.56Mhz			

S/N	Product Name	Model	Picture	Technical Parameters	Remark
<b>UHF Long Range Reader</b>					
221	0-5 meter 915 UHF long range reader 7DB	READER-05UHF		Work Frequency:902MHZ----- 928MHZ Option for 865-870mHZ Work Model:Software setting frequency hopping or fixed frequency operation Support card: ISO 18000-6C (EPC Gen2) Full Interface: WG26/WG34/WG98, RS232/RS485, USB, TCP Standard Interface:WG26/WG34,RS485 OR RS232 Card reading distance: 0-5m (high power 0-8m) Working frequency: 915MHz Work current: 9V 150mA Size: 215mm × 215mm × 50mm Weight: 0.8kg	



S/N	Product Name	Model	Picture	Technical Parameters	Remark		
222	0-10 meter 915 UHF long range reader	READER-10UHF		Work Frequency:902MHZ----- 928MHZ Option for 865-870mHZ Work Model:Software setting frequency hopping or fixed frequency operation Support card: ISO 18000-6C (EPC Gen2) Full Interface: WG26/WG34/WG98, RS232/RS485, USB, TCP Standard Interface:WG26/WG34,RS485 OR RS232 Card reading distance: 0-5m (high power 0-8m) Working frequency: 915MHz Work current: 9V 150mA Size: 257mm × 257mm × 42mm Weight: 1.45kg			



S/N	Product Name	Model	Picture	Technical Parameters	Remark		
223	0-12 meter 915 UHF long range reader	READER-12UHF		<p>Work Frequency:902MHZ----- 928MHZ Option for 865-870mHZ Work Model:Software setting frequency hopping or fixed frequency operation Support card: ISO 18000-6C (EPC Gen2) Full Interface: WG26/WG34/WG98, RS232/RS485, USB, TCP Standard Interface:WG26/WG34,RS485 OR RS232 Card reading distance: 0-5m (high power 0-8m) Working frequency: 915MHz Work current: 9V 150mA Size: 240mm × 420mm × 56mm Weight: 1.55kg</p>			





S/N	Product Name	Model	Picture	Technical Parameters	Remark		
224	0-35 meter 915 UHF long range reader	READER-35UHF		Work Frequency:902MHZ----- 928MHZ Option for 865-870mHZ Work Model:Software setting frequency hopping or fixed frequency operation Support card: ISO 18000-6C (EPC Gen2) Full Interface: WG26/WG34/WG98, RS232/RS485, USB, TCP			

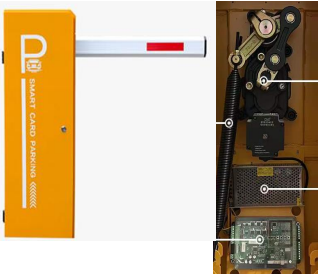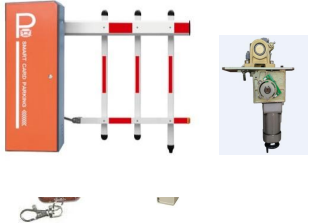

S/N	Product Name	Model	Picture	Technical Parameters	Remark		
<b>Barrier Boom Gate</b>							
225	AC Motor Stright Pole Boom Gate	BG-AC100	  	Barrier Boom Gate Octagonal Powder Coated Aluminum .50-60W Single phase asynchronous AC motor with over heat protection function .Brake rod landing time 0.2~6s .Work Enviroment -25~+60 Degree Relative humidity less than 95%& no condensation, Gate center to off-ground height 885mm Lifeleaf time:5 million times Size: 270*340*1000mm Thickness:1.5			

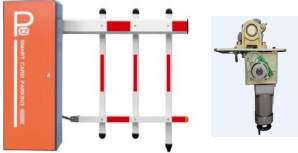






S/N	Product Name	Model	Picture	Technical Parameters	Remark		
226	Brushless Motor Stright Pole Boom Gate	BG-BRULSS 100		Barrier Boom Gate Octagonal Powder Coated Aluminum .50-60W Single phase asynchronous Brushless motor with over heat protection function .Brake rod landing time 0.2~6s .Work Enviroment -25~+60 Degree Relative humidity less than 95%& no condensation. Gate center to off-ground height 885mm Lifeleaf time:5 million times Size: 270*340*1000mm Thickness:1.5			
227	AC Motor Barrier Boom Gate	BG-AC200		Barrier Boom Gate Octagonal Powder Coated Aluminum .50-60W Single phase asynchronous AC motor with over heat protection function .Brake rod landing time 2.5~6s .Work Enviroment -25~+60 Degree Relative humidity less than 95%& no condensation. Gate center to off-ground height 885mm Lifeleaf time:5 million times Size: 285*340*980 Thickness:2.0 Extra Thickness Steel Mounted Chip core motor and be stable running the 6 meter barrier rod			

S/N	Product Name	Model	Picture	Technical Parameters	Remark		
228	Brushless Motor Barrier Boom Gate	BG-BRULSS200		Barrier Boom Gate Octagonal Powder Coated Aluminum .50-60W Single phase asynchronous Brushless motor with over heat protection function .Brake rod landing time 2.5~6s .Work Enviroment -25~+60 Degree Relative humidity less than 95%& no condensation, Gate center to off-ground height 885mm Lifeleaf time:5 million times Size: 285*340*980 Thickness:2.0 Extra Thickness Steel Mounted Chip core motor and be stable running the 6 meter barrier rod			
							

S/N	Product Name	Model	Picture	Technical Parameters	Remark
<b>Parking Ticketing Box</b>					
229	Ticket Box	Ticket Box -1325		<p>Ticket Box for issue or return ic/id card</p> <p>Size:32*44*1325mm</p> <p>Available for card size of 85*54+-0.5mm with thickness of 0.2-2.4mm (adjustable)The default factory set up is 0.8mm</p>	
<b>Parking Ticketing RFID Card Dispenser/Collector</b>					
230	RFID card issue machine	ISSUER-01CARD		<p>Available for card size of 85*54+-0.5mm with thickness of 0.2-2.4mm (adjustable)The default factory set up is 0.8mm</p>	
231	RFID card collect machine	COLLECTOR-01CARD		<p>Available for card size of 85*54+-0.5mm with thickness of 0.2-2.4mm (adjustable)The default factory set up is 0.8mm</p> <p>Support link to boom gate open once the card is been collected</p>	 <ul style="list-style-type: none"> <li>-1. 24V-</li> <li>-2. 24V+</li> <li>3. 0V (signal/ground)</li> <li>4. card out signal</li> <li>5. reset input</li> <li>-6. 0V (signal/ground)</li> <li>7. ground sense signal input</li> <li>8. Pre open input/return input</li> <li>9. gate open/card position output</li> <li>10. less card output</li> <li>..</li> </ul>

S/N	Product Name	Model	Picture	Technical Parameters	Remark		
<b>Parking Ticketing Payment Machine</b>							
232	Auto Payment Machine	PAY-01CARD		AUTOMATIC Payment machine with touch screen and have windows system support linkage to bank payment system between camera and boom gate			
<b>Loop Sensor</b>							
233	Ground Sense Vehicle Loop Detector	LOOP-01		Supply voltage:230V AC , 115V AC, 24V DC/AC, 12V DC/AC ( Please the label on the detector for more information) Voltage tolerance AC:+10% / -15% Voltage tolerance: DC±15% Power Consumption:4.5VA Output relays:240V/5A Operating temperature:-20°C to +65°C Storage temperature:-40°C to +85°C			

S/N	Product Name	Model	Picture	Technical Parameters	Remark		
234	Radar Anti Fall Loop Detector	LOOP-01RADAR		Transmit frequency:24.00-24.25 GHz Output power:10dBm Update rate:20ms Power consumption:1.5W Detection characteristics Detection distance:0.1~10meters Detection target:human, vehicle Distinguish following cars:0.6 meters Antenna characteristics Beam width/TX Horizontal in 22°, Elevation in 37° Hardware characteristics Supply voltage:6~24V DC Supply current:0.12A Operating temperature:-40~+85°C Protection class:IP66			
<b>UHF Card Distributor</b>							
235	USB UHF CARD DISTRIBUTOR	DST-100UHF		Read and Write uhf card number			
236	BLUETOOTH UHF CARD DISTRIBUTOR	DST-200UHF		Bluetooth Read and Write uhf card number Support card: ISO 18000-6C (EPC Gen2) Interface: USB, Wireless 2.4G, Bluetooth Working frequency: 915MHz Working current: 5V 150mA Size: 90mm × 50mm × 22mm Weight: 50g			

S/N	Product Name	Model	Picture	Technical Parameters	Remark		
<b>UHF Card &amp; Sticker</b>							
237	UHF Card	Card-UHF01		Uhf Card work for uhf long range reader			
238	UHF Sticker Windshield	Sticker -UHF/WS		UHF Sticker Windshield			